




DIE CAST ALUMINUM FULL BLAST GATE

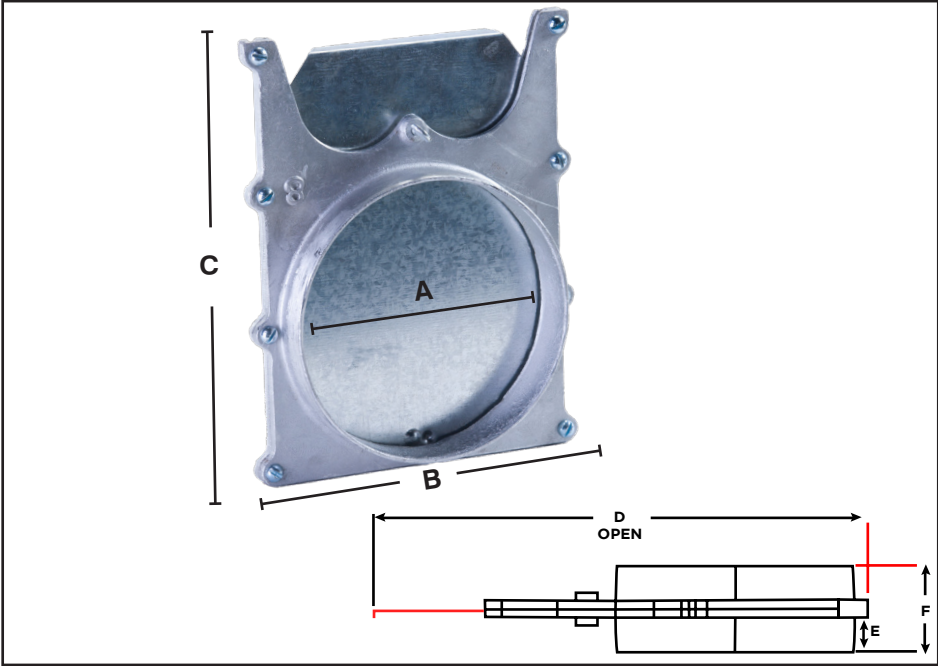

DESCRIPTION

- Used for wood, plastic, powder and other dusts in collector systems.
- Economically designed. Locking screw included.
- connecting collars are undersized to allow slip-fit into nominal pipe or duct.
- Bolt-together construction for ease of disassembly for cleaning.
- Maximum temperature 400° F.
- Available in sizes 3" to 24".

DIE CAST ALUMINUM FULL BLAST GATE

Duct Size	PART#	A	B	C	D	E	F	WT.
3"	BGF03	2.82	4.01	5.64	7.00	0.75	1.91	0.7
4"	BGF04	3.87	5.00	6.86	9.12	0.75	1.87	1.0
5"	BGF05	4.76	6.00	8.00	11.75	0.88	2.16	1.4
6"	BGF06	5.82	7.00	9.99	14.38	0.88	2.13	2.0
7"	BGF07	6.81	8.00	11.25	15.62	1.05	2.50	2.7
8"	BGF08	7.85	9.62	12.62	18.12	1.53	3.50	4.4
9"	BGF09	8.88	10.62	13.60	20.38	1.33	3.17	5.4
10"	BGF10	9.83	11.37	14.37	22.12	1.50	3.70	6.2
11"	BGF11	10.88	12.37	15.37	25.38	1.44	3.44	7.4
12"	BGF12	11.80	13.25	16.25	26.75	1.49	3.66	8.0
14"	BGF14	13.84	15.79	18.96	30.12	1.88	4.39	11.8
16"	BGF16	15.88	17.90	21.28	34.88	1.84	4.40	15.1
18"	BGF18	17.80	20.23	32.81	40.38	3.11	7.04	30.0
20"	BGF20	19.78	22.37	34.24	45.00	3.16	7.22	37.0
22"	BGF22	21.72	24.60	34.11	47.25	3.12	7.10	45.0
24"	BGF24	23.68	26.64	34.38	51.88	3.15	7.22	55.0

HOST TO GATE CONNECTOR

DIS	PART#
2.5"	HGC2.5
3"	HGC03
4"	HGC04
5"	HGC05
6"	HGC06
7"	HGC07
8"	HGC08
10"	HGC10
12"	HGC12



Used to provide an extended external lip for hose connection to a blast gate or ball joint. Slip hose over tapered end.

ALL STATED SPECIFICATION ARE SUBJECT TO CHANGE WITHOUT NOTICE OR OBLIGATION